

5503

ZAWÓR ZWROTNY Z MOSIĘŻNYM GRZYBKIEM

PARAMETRY (ZGODNE Z WYKRESEM P-T)



Dla DN 15; 20; 25; 32; 40; 50

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+120°C	+1°C	1,0 MPa	ISO 228

PARAMETRY (ZGODNE Z WYKRESEM P-T)

Dla DN 65

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+120°C	+1°C	0,8 MPa	ISO 228

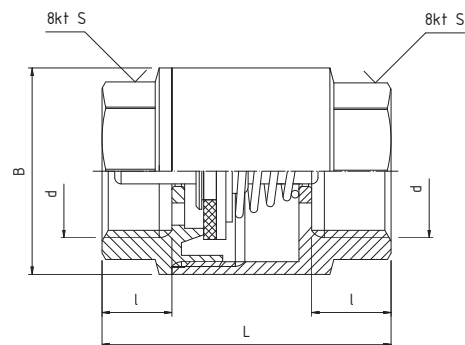

DANE TECHNICZNE



*Współczynnik Kv obliczony na podstawie wartości Q.
Wymiary w mm

indeks	wielkość	DN	Q[m³/h]	Kv*[m³/h]	d	L	l	B	S
04-100-0150-000	1/2"	15	1,01	3,19	G1/2	45,5	11,0	32,5	26
04-100-0200-000	3/4"	20	1,73	5,47	G3/4	52,0	13,0	37,5	30
04-100-0250-000	1"	25	2,77	8,76	G1	54,0	13,5	44,0	37
04-100-0320-000	1 1/4"	32	4,93	15,59	G1 1/4	61,0	15,0	58,5	46
04-100-0400-000	1 1/2"	40	7,42	23,46	G1 1/2	70,0	16,5	66,5	52
04-100-0500-000	2"	50	10,12	32,00	G2	78,0	16,5	79,5	66
04-100-0650-000	2 1/2"	65			G2 1/2	104,0	24,0	93,0	81

MATERIAŁY

- **KADŁUB, WKRETKA, GRZYBEK:** miedź
- **USZCZELKA GRZYBKĄ:** uszczelka płaska - NBR
- **SPRĘŻYNA:** stal nierdzewna

WYKRES P-T

