

PHA-021

ZAWÓR ZWROTNY KLAPOWY



PARAMETRY (ZGODNE Z WYKRESEM P-T)


Dla DN 15; 20; 25

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+120°C	-30°C	1,6 MPa	ISO 228

PARAMETRY (ZGODNE Z WYKRESEM P-T)

Dla DN 32; 40; 50; 65; 80

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+120°C	-30°C	1,0 MPa	ISO 228

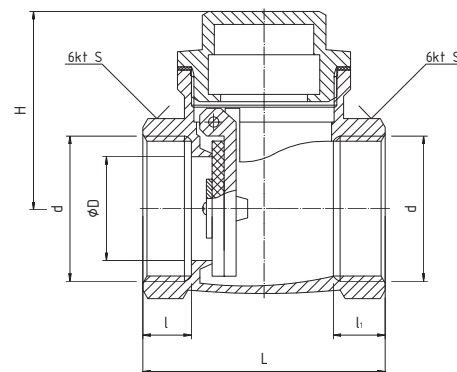

DANE TECHNICZNE



*Współczynnik Kv obliczony na podstawie wartości Q.
Wymiary w mm

indeks	wielkość	DN	Q[m ³ /h]	Kv*[m ³ /h]	d	øD	L	l	l ₁	H	S
04-021-0150-000	1/2"	15	1,87	5,91	G1/2	14,0	49,5	11,0	10,0	31,0	24,0
04-021-0200-000	3/4"	20	3,06	9,68	G3/4	17,0	57,5	12,0	11,0	35,0	30,5
04-021-0250-000	1"	25	5,22	16,51	G1	21,5	61,5	14,0	11,5	39,0	37,5
04-021-0320-000	1 1/4"	32	8,89	28,11	G1 1/4	27,0	77,0	17,5	15,0	49,0	47,0
04-021-0400-000	1 1/2"	40	11,70	37,00	G1 1/2	35,0	83,0	18,0	16,0	56,0	53,5
04-021-0500-000	2"	50	17,71	56,00	G2	47,0	90,0	19,0	16,0	59,0	65,0
04-021-0650-000	2 1/2"	65			G2 1/2	57,0	120,0	21,0	19,0	77,0	82,0
04-021-0800-000	3"	80			G3	68,0	134,0	23,0	22,0	84,0	96,0

MATERIAŁY

- **KORPUS, KLAPA, KOREK:** mosiądz CW617N
- **PODKŁADKA:** stal nierdzewna
- **USZCZELKA:** fibra
- **USZCZELNIENIE KLAPY:** uszczelka płaska-NBR

WYKRES P-T

