

PHA-020



ZAWÓR ZWROTNY Z MOSIĘŻNYM GRZYBKIEM

PARAMETRY (ZGODNE Z WYKRESEM P-T)
Dla DN 15; 20; 25

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+120°C	-30°C	1,6 MPa	ISO 228

PARAMETRY (ZGODNE Z WYKRESEM P-T)
Dla DN 32; 40; 50; 65; 80; 100;

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+120°C	+30°C	1,0 MPa	ISO 228



DANE TECHNICZNE




*Współczynnik Kv obliczony na podstawie wartości Q.
Wymiary w mm

indeks	wielkość	DN	Q[m ³ /h]	Kv*[m ³ /h]	d	L	I	B	S
04-020-0150-000	1/2"	15	0,82	2,59	G1/2	44,5	10,5	34,0	26,0
04-020-0200-000	3/4"	20	1,84	5,82	G3/4	48,0	12,0	42,5	32,0
04-020-0250-000	1"	25	3,10	9,80	G1	55,5	13,5	47,5	38,0
04-020-0320-000	1 1/4"	32	5,11	16,16	G1 1/4	61,0	15,0	58,5	46,0
04-020-0400-000	1 1/2"	40	7,13	22,55	G1 1/2	68,0	16,0	66,5	52,0
04-020-0500-000	2"	50	11,74	37,13	G2	76,5	18,0	79,6	66,0
04-020-0650-000	2 1/2"	65			G2 1/2	104,0	24,0	93,0	81,0
04-020-0800-000	3"	80			G3	102,0	25,0	109,5	93,5
04-020-1000-000	4"	100			G4	112,0	26,0	139,0	121,5

MATERIAŁY

- **KADŁUB, WKRĘTKA, GRZYBEK:** mosiądz CW617N
- **USZCZELKA GRZYBK:** uszczelka płaska - NBR
- **SPRĘŻYNA:** stal nierdzewna
- **WKŁADKA TŁUMIKA:** tworzywo sztuczne (nie dotyczy DN65, DN80, DN100)

WYKRES P-T

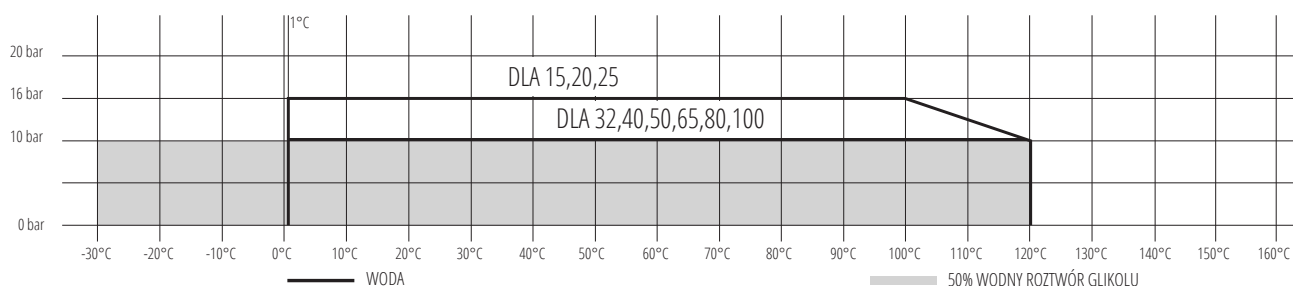

RYСУNEK TECHNICZNY

