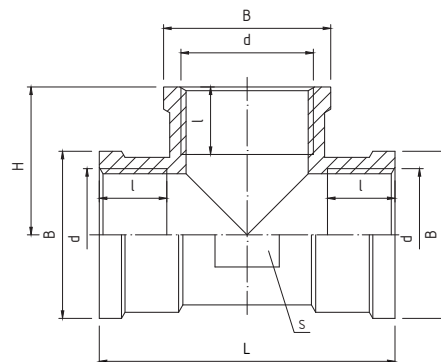


PHA-312

TRÓJNIK MOSIĘŻNY
WZMOCNIONY

PARAMETRY (ZGODNE Z WYKRESEM P-T)

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+180°C	-30°C	1,6 MPa	ISO 228

DANE TECHNICZNE



Wymiary w mm

indeks	wielkość	d	L	I	H	B	S
07-012-0100-000	3/8"	G3/8	39,8	9,0	20,0	22,5	17,8
07-012-0150-000	1/2"	G1/2	46	10,5	23,0	26,0	21,8
07-012-0200-000	3/4"	G3/4	55	11,5	27,5	33,5	27,8
07-012-0250-000	1"	G1	67	13,5	33,5	42,0	35
07-012-0320-000	1 1/4"	G1 1/4	76	14,5	38,0	50,5	44
07-012-0400-000	1 1/2"	G1 1/2	89	16,5	44,5	57,0	51
07-012-0500-000	2"	G2	104	18,5	52,0	69,0	62,8

MATERIAŁY

- **KORPUS, ŁĄCZNIK*, NAKRĘTKA***: mosiądz CW617N
(dla łączników chromowanych z powłoką chromowaną)
- **USZCZELKA ŁĄCZNIKA***: pierścień uszczelniający typu „O” - NBR

* - dwuzłaczki

WYKRES P-T

