


1048

ŚRUBUNEK KĄTOWY O-RING MOSIĘŻNY

PARAMETRY (ZGODNE Z WYKRESEM P-T)

T _{MAX}	T _{MIN}	P _{MAX}	GW/GZ wg
+120°C	-30°C	1,6 MPa	ISO 228

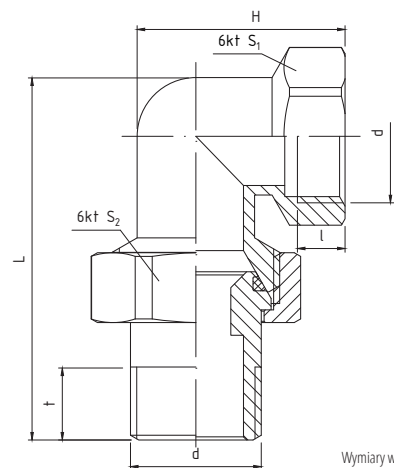

Wymiary w mm

DANE TECHNICZNE



indeks	wielkość	d	L	t	l	H	S ₁	S ₂
07-148-0100-000	3/8"	G3/8	52,0	13,0	9,0	28,0	20,5	26
07-148-0150-000	1/2"	G1/2	57,0	11,5	9,5	33,0	25,0	30
07-148-0200-000	3/4"	G3/4	68,7	13,0	10,0	37,0	30,5	36
07-148-0250-000	1"	G1	82,0	16,0	11,5	51,0	36,5	46
07-148-0320-000	1 1/4"	G1 1/4	98,0	19,0	14,0	64,5	46,0	53

MATERIAŁY

- **KORPUS, ŁĄCZNIK*, NAKRĘTKA***: mosiądz CW617N
(dla łączników chromowanych z powłoką chromowaną)
- **USZCZELKA ŁĄCZNIKA***: pierścień uszczelniający typu „O” - NBR

* - dwuzłazki

WYKRES P-T

