
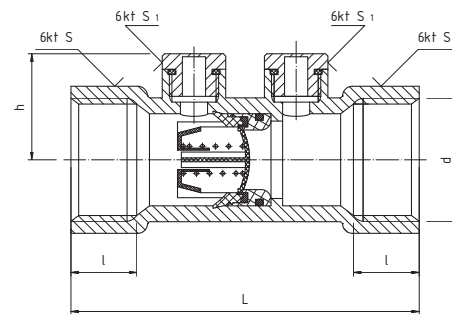


PHA-013

**ZAWÓR
ANTYSAŻENIOWY
TYP "EA"**

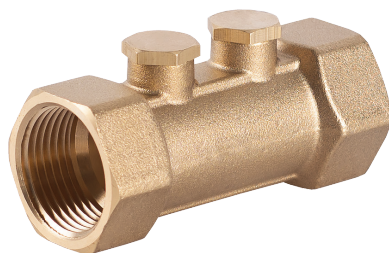

PARAMETRY (ZGODNE Z WYKRESEM P-T)

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+65°C	+1°C	1,0 MPa	ISO 228

* oraz +90°C przez 1 godzinę

DANE TECHNICZNE



1) współczynnik oporu przepływu
Wymiary w mm.

indeks	wielkość	DN	Q [m³/h]	Kv* [m³/h]	d	L	l	h	S	S ₁	ξ¹
01-013-0150-000	½"	15	0,88	2,78	G½	65	12	23,5	25	16,8	4,48
01-013-0200-000	¾"	20	1,64	5,2	G¾	75	14	23,5	31	16,8	2,28
01-013-0250-000	1"	25	2,59	8,2	G1	90	17	27,0	38	16,8	1,91

MATERIAŁY

- **KORPUS, KOREK:** mosiądz CW617N
- **GRZYBEK, GNIAZDO GRZYBKA, PROWADNICA GRZYBKA:** poliamid
- **USZCZELKA GRZYBKA, KORKA:** pierścień uszczelniający typu „O” - EPDM

POZOSTAŁE PARAMETRY

CIŚNIENIE OTWARCIA: 1000 Pa
ZABEZPIECZENIE ODPOWIEDNIE DLA PŁYNÓW: kategorii 1 i 2
SYMBOL ZESPOŁU ZABEZPIECZAJĄCEGO:



WYKRES P-T

