


PHA-318

**TRÓJNIK
WZMOCNIONY
POD ODPOWIETRZNIK**

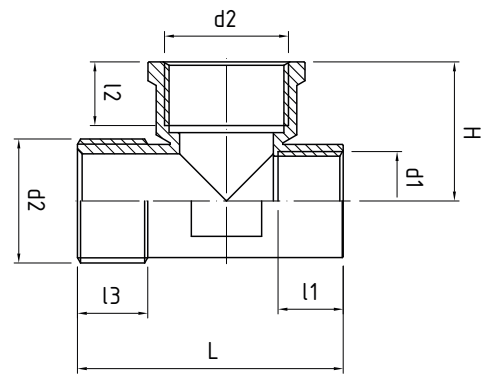

PARAMETRY (ZGODNE Z WYKRESEM P-T)

| T _{MAX} | T _{MIN} | P _{MAX} | GZ/GW wg |
|------------------|------------------|------------------|----------|
| +180°C | -30°C | 1,6 MPa | ISO 228 |

DANE TECHNICZNE



Wymiary w mm

| indeks | wielkość | d1 | d2 | L | H | l1 | l2 | l3 |
|-----------------|----------|------|------|------|------|------|------|----|
| 07-018-2015-000 | ¾"x½" | G1/2 | G3/4 | 56,7 | 29,5 | 14 | 13,5 | 15 |
| 07-018-2515-000 | 1"x½" | G1/2 | G1 | 65,4 | 33,7 | 13,5 | 15 | 16 |

MATERIAŁY

• **KORPUS:** mosiądz CW617N

WYKRES P-T

