


PHA-304

**NYPEŁ MOSIĘŻNY
WZMOCNIONY**

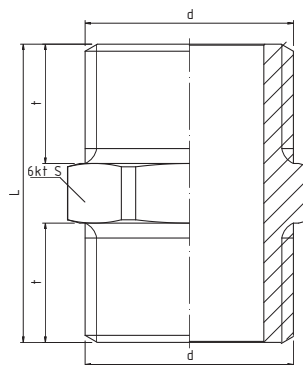

PARAMETRY (ZGODNE Z WYKRESEM P-T)

T _{MAX}	T _{MIN}	P _{MAX}	GZ wg
+180°C	-30°C	1,6 MPa	ISO 228

DANE TECHNICZNE



Wymiary w mm

indeks	wielkość	d	L	t	S
07-004-0100-000	3/8"	G3/8	24	10	18
07-004-0150-000	1/2"	G1/2	30	12	22
07-004-0200-000	3/4"	G3/4	32	13	28
07-004-0250-000	1"	G1	38	15	34
07-004-0320-000	1 1/4"	G1 1/4	40	16	42
07-004-0400-000	1 1/2"	G1 1/2	46	18	48
07-004-0500-000	2"	G2	52	20	60

MATERIAŁY

- **KORPUS, ŁĄCZNIK*, NAKRĘTKA***: mosiądz CW617N
(dla łączników chromowanych z powłoką chromowaną)
- **USZCZELKA ŁĄCZNIKA***: pierścień uszczelniający typu „O” - NBR

* - dwuzłączki

WYKRES P-T

