


PHA-314

TRÓJNIK
REDUKCYJNY
MOSIĘŻNY
WZMOCNIONY

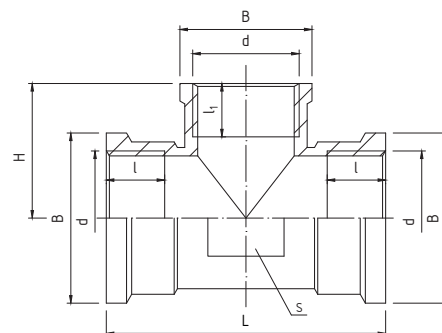

PARAMETRY (ZGODNE Z WYKRESEM P-T)

T _{MAX}	T _{MIN}	P _{MAX}	GW wg
+180°C	-30°C	1,6 MPa	ISO 228

DANE TECHNICZNE



Wymiary w mm

indeks	wielkość	d ₁	d ₂	L	I	I ₁	H	B ₁	B ₂	S
07-014-2015-000	¾"x½"	G¾	G½	55	11,5	10,5	26,5	33,5	26,0	27,8
07-014-2515-000	1"x½"	G1	G½	67	13,5	10,5	29,8	42,0	26,0	35
07-014-2520-000	1"x¾"	G1	G¾	67	13,5	11,5	30,0	42,0	33,5	35

MATERIAŁY

- **KORPUS, ŁĄCZNIK*, NAKRĘTKA*:** mosiądz CW617N
(dla łączników chromowanych z powłoką chromowaną)
- **USZCZELKA ŁĄCZNIKA*:** pierścień uszczelniający typu „O” - NBR

* - dwuzłazki

WYKRES P-T

