
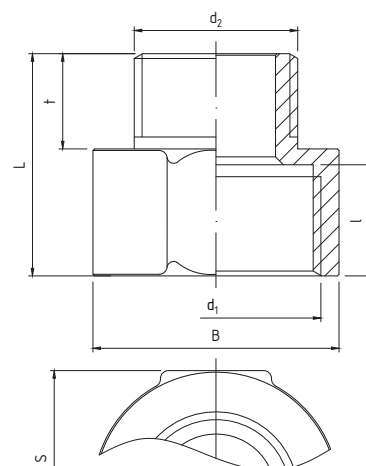


PHA-308

**REDUKCJA
MUFOWO-
NYPLOWA
MOSIĘŻNA WZMOCNIONA**



PARAMETRY (ZGODNE Z WYKRESEM P-T)

T _{MAX}	T _{MIN}	P _{MAX}	GW/GZ wg
+180°C	-30°C	1,6 MPa	ISO 228

DANE TECHNICZNE



Wymiary w mm

indeks	wielkość	d ₁	d ₂	L	t	l	B	S
07-008-1510-000	1/2"x3/8"	G1/2	G3/8	24	10	12	25,0	25
07-008-2015-000	3/4"x1/2"	G3/4	G1/2	28	12	14	31,0	31
07-008-2520-000	1"x3/4"	G1	G3/4	31	13	15	39,0	39

MATERIAŁY

- **KORPUS, ŁĄCZNIK*, NAKRĘTKA*:** mosiądz CW617N
(dla łączników chromowanych z powłoką chromowaną)
- **USZCZELKA ŁĄCZNIKA*:** pierścień uszczelniający typu „O” - NBR

* - dwuzłazki

WYKRES P-T

